


# 30RKD/1100

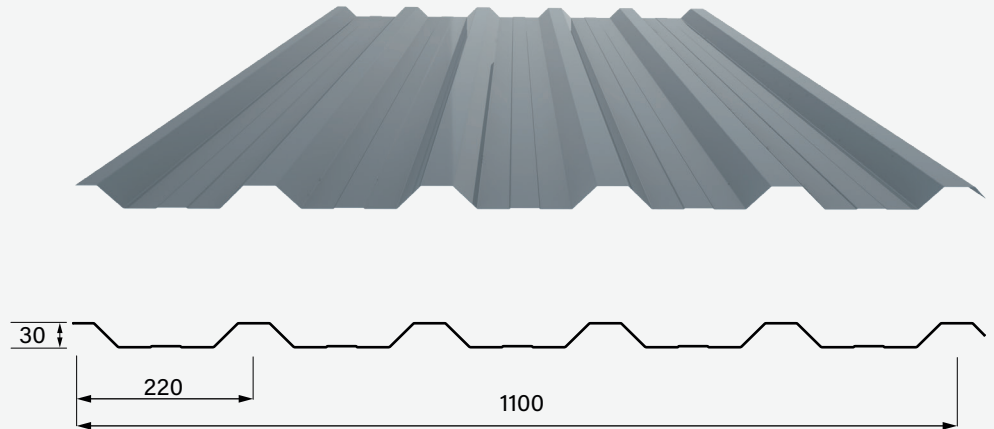

## Technische Eigenschaften

Profilplattentyp	Dicke des Stahls [mm]	Gewicht [kg/m <sup>2</sup> ]	I <sub>eff</sub> [cm <sup>4</sup> /m]
30RKD/1100	0,50	4,5	3,65
	0,63	5,6	5,20
	0,70	6,2	6,00
	0,75	6,7	6,60

**Stahlsorte** S280GD, S320GD

**Beschichtungen** Colorcoat HPS200 Ultra®, Prisma® 65, Prisma® 40, Granite® HDX, Granite® HDS, Polyester, Holzmaserung Platisol, Delft Unique Colour, Magnelis® ZM100, Magnelis® ZM120, Galvanisiert Z275, Innenbeschichtung, Alu Zink 185

**Optional** Kondensationshemmender Filz

**Abmessungen** Standard 600 - 11.500

**Länge [mm]**  
 Minimum 500  
 Maximum 13.000

**Verpackung**  
 Max. Anzahl pro Paket 75 Stück  
 Max. Gewicht pro Paket 2.000 kg

**Zertifikate**

