
## **COILS & SLITTING**

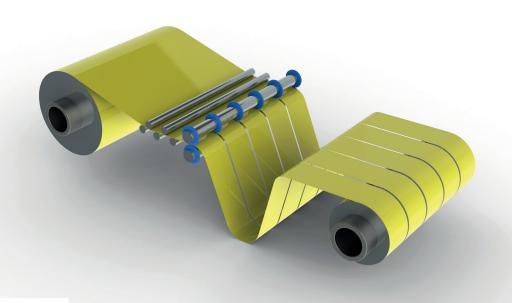

## **Product features**

## **Generic properties**

Material options[-]Galvanised steel, coated steelMaximum tensile stretch[N/mm²]650

Maximum yield strength [N/mm²] 400

 Thickness range
 [mm]
 0.32 - 3.0

 Coil width range
 [mm]
 30 - 1,500

Maximum coil diameter[mm]1,800Minimum coil diameter[mm]500Nominal coil diameter - internal[mm]508, 610

Maximum coil weight [Tonnes] 15

Maximum number of strips30for thickness up to 0.7mmSlit capability (Rmax 510 N/mm²)25for thickness up to 1.0mm

15 for thickness up to 1.5mm 10 for thickness up to 2.0mm

## **Processing options**


Slit

Cut

Attach protective film to one side

**Emboss** 

Perforation possibilities



Perforation rate 22.7%

