


35KD/1035

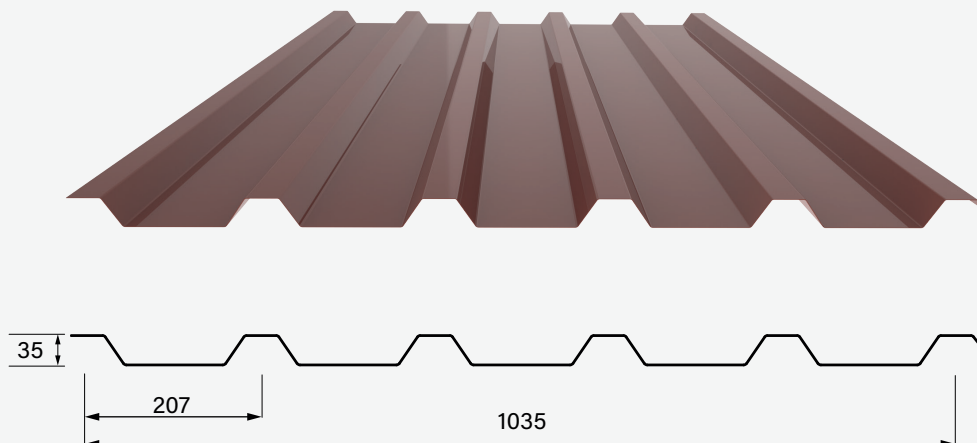

Technische eigenschappen

| Profielplaatype | Staaldikte [mm] | Gewicht [kg/m ²] | I _{eff} [cm ⁴ /m] |
|-----------------|-----------------|------------------------------|---------------------------------------|
| 35KD/1035 | 0,63 | 6,0 | 9,40 |
| | 0,70 | 6,6 | 10,90 |
| | 0,75 | 7,1 | 12,00 |
| | 0,88 | 8,3 | 14,90 |

Staalkwaliteit

S280GD, S320GD

Coatings

Colorcoat HPS200 Ultra®, Prisma® 65, Prisma® 40, Granite® HDX, GraNite® HDS, Polyester, Houtnerf platisol, Delft Unique Color, Magnelis® ZM100, Magnelis® ZM120, Verzinkt Z275, Interieur coating, Alu zink 185

Optioneel

Anti-condensvilt

Afmetingen

Standaard 600 - 11.500

Lengte [mm]

Minimaal 500

Maximaal 13.000

Verpakking

Max. aantal per pakket 75 stuks

Max. gewicht per pakket 2.000 kg

Certificaten

