


35R/1035

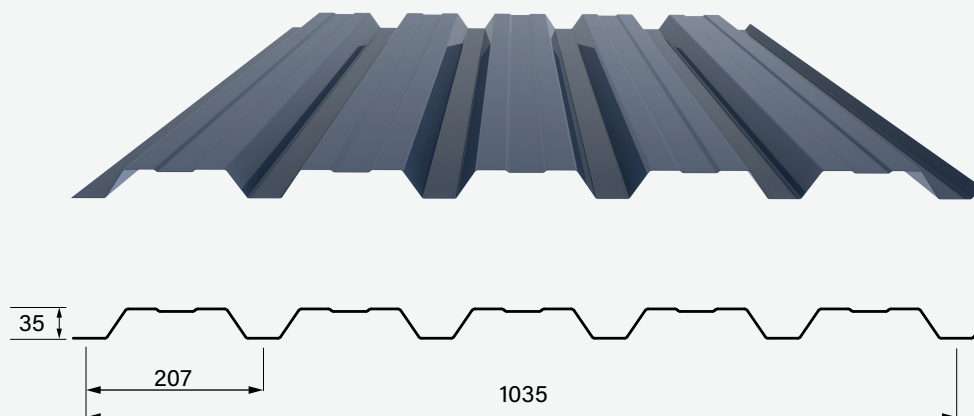

Technische eigenschappen

| Profielplaattype | Staaldikte [mm] | Gewicht [kg/m ²] | I _{eff} [cm ⁴ /m] |
|------------------|-----------------|------------------------------|---------------------------------------|
| 35R/1035 | 0,75 | 7,1 | 11,59 |
| | 0,88 | 8,3 | 14,67 |
| | 1,00 | 9,5 | 17,49 |

| | | | |
|------------------------|---|--------------|--|
| Staal kwaliteit | S280GD, S320GD | | |
| Coatings | Colorcoat HPS200 Ultra®, Prisma® 65, Prisma® 40, Granite® HDX, Granite® HDS, Polyester, Delft Unique Color, Magnelis® ZM120, Verzinkt Z275, Interieur coating, Alu zink 185 | | |
| Optioneel | Geperforeerd | | |
| Afmetingen | Standaard | 600 - 11.500 | |
| Lengte [mm] | Minimaal | 500 | |
| | Maximaal | 15.000 | |
| Verpakking | Max. aantal per pakket | 75 stuks | |
| | Max. gewicht per pakket | 2.000 kg | |

Certificaten

